

10/531296  
537,596

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053389 A1**

(51) International Patent Classification<sup>7</sup>: **F21V 19/00**

A. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number:  
PCT/IB2003/005040

(74) Agent: BOSMA, Rudolphus, H., A.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date:  
4 November 2003 (04.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02080159.3 9 December 2002 (09.12.2002) EP

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): LINSSEN, Petrus, J.,

[Continued on next page]

(54) Title: A FIXATION MEMBER CONSISTING OF ELASTIC MATERIAL

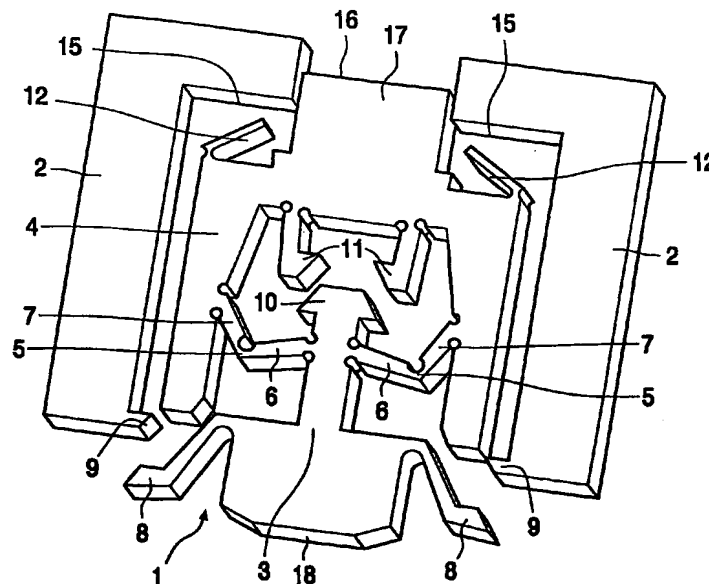

(57) Abstract: A fixation member consisting of elastic material, comprising a first portion (3) and a second portion (4) interconnected by first spring means (5). Said first portion (3) comprise first catch means (8) for engaging with a frame (2) to which the fixation member (1) is to be fixed after said first portion (3) is pushed towards said second portion (4), while said first spring means (5) push said second portion (4) against said frame (2). Said first portion (3) furthermore comprise second catch means (10) for engaging with corresponding catch means (11) of said second portion (4) when said first portion (3) is pushed further towards said second portion (4) against an increasing force of said first spring means (5), whereby said first catch means (8) retract and thereby disengage from the engagement with said frame (2).

WO 2004/053389 A1